

KI-D21SE80F-i30SMU




- سه سال گارانتی پلاتینیوم بدون قید و شرط کی تی
- چهار سال ضمانت پایداری کیفیت تصویر

قابلیت های هوشمند

- عبور از خط
- فنس مجازی
- ورود به منطقه
- خروج از منطقه
- تشخیص چهره
- گم شدن اشیاء
- اضافه شدن اشیاء
- تردد شمار هوشمند
- تشخیص حرکت سریع افراد
- تشخیص تغییر زاویه دوربین
- تشخیص صدای غیر عادی
- تشخیص عدم فوکوس لنز
- تشخیص پرسه زنی افراد
- تشخیص پارک غیر مجاز خودرو

سایر برتری ها

- پشتیبانی از میکرو SD با ظرفیت 256Gb
- بدنه ضد آب و گرد و غبار با درجه IP67, IK10
- سرور انتقال تصویر در ایران
- پشتیبانی از H.265+ / H.264+
- پشتیبانی از ONVIF ورژن 2.6
- قابلیت دید در شب هوشمند
- قابلیت WDR, BLC, HLC, Defog
- پشتیبانی از ضبط اضطراری ANR
- امکان سفارش با نرم افزار امن و محدود شده جهت استفاده در مراکز با حساسیت بالا به همراه گواهی نامه.

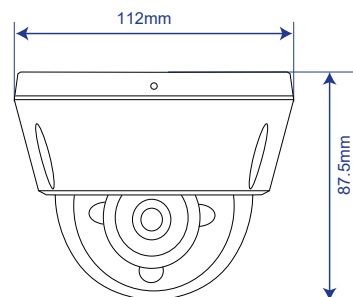

Camera	
Image Sensor	8MP Progressive scan Cmos Sensor (1/2.7")
CPU	Dual-Core ARM Cortex
Resolution	3840*2160 (8MP)
Available IR Range	30~40 m Smart IR SMD Technology 30 m Warm Light Technology Smart Light Technology
D/N Filter	IR cut filter with auto switch
Min illumination	Color: 0.006 lux(AGC on) - B/W: 0.0 Lux(IR on) (Warm Light On)
Night Vision	Dual Light Technology
Lens	
Lens Type	Fixed
Focal Length	2.8 mm @F1.6
Angle of View	H-FOV: 114°, V-FOV: 61°, D-FOV: 161°
DORI Distance	
DORI	Detect: 56m Observe: 22m Recognize: 11m Identify: 5.1m
Picture Adjust	
Picture Function	120dB WDR/DWDR, 2D/3D DNR, BLC, HLC, ROI, Defog, Rotate
Shutter Speed	Manual (1/3 ~ 1/10,000), Auto
Image Parameter Control	Off, On, Timing (Adjust 0 ~ 255)
D/N Control	Timing, Auto, Color on, Color off
S/N	> 52dB
Image Parameter	Saturation, Brightness, Contrast, Sharpness, Hue, Image Style, Anti Flicker
Video / Audio	
Video Compression	H.264+(Ultra H.264), H.265+ (Ultra H.265)
Audio Compression	G.711A, G.711U, ACC, PCM, G.726
Frame Rate(60Hz)	15fps@ 8MP (3840*2160), 30fps@ 5MP, 30fps@ 4MP, 30fps@ 2MP
Transmission Stream	Triple Stream (Video Bit Rate: 11 Kbps~10 Mbps)
Network	
Protocols	TCP/IP(v4, v6), ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, IGMP, UPnP, SMTP, UPnP-TM, P2P, Bonjour, SNMP (v1, v2, v3), UDP, NAT, Multicast, RTMP
Compatibility	Onvif Ver2.6, Profile S, G, T, CGI, SDK, API

Streaming Method	Unicast, Multicast
Web Viewer	IE, Edge, Firefox, Chrome
Smart Device	iOS, Android Phone & Tablet
Function	
Recording	FTP, NVR, CMS, VMS, SD Card, ANR
Record Type	Manual, Motion Detection, Smart Detection, Schedule
Alarm Triggers	All Intelligent Function
Event Action	Email, PTZ, Snapshot, Recording, Buzzer, Pop up, Show Message, Smart Light
Event	Smart Motion Detection, Video Shelter
Intelligent Function	15 Smart Function Line Crossing, Area Intrusion, Region Entrance, Region Exiting, Fast Moving, Unattended Object, Object Missing, Loitering Detection, Blurred Detection, Scene Change Detection, Audio exception Detection, Face Detection, Smart People Counting, Parking detection, Crossing Line Statistics
Interface	
Network	1 RJ45 (10M / 100M) Ethernet Port
External Audio	N/A
Internal Audio	Internal Mic
CVBS	N/A
Power	PoE LAN, DC In
Reset Button	Yes (Optional)
Memory Slot	Yes - Micro SD/SDHC/SDXC Slot (256 Gb Max) (ANR Support)
General	
Protection Rating	IP67, IK10, 2KV Surge Protection
Power Supply	DC12V ± 10%
PoE Supply	IEEE802.3af - Max 7 Watt
Web Language	English, Persian
Dimension	112*87.5 mm
Weight	450 g
Operation Humidity	Humidity 95% or less (non-condensing)
Operation Temp	-30°C ~ +60°C
Guarantee	
Product Guarantee	3 Years Platinum Guarantee
MTBF	100K hrs min. MIL-HDBK-217F (25°)
Certificates	EN, CN, FCC, CFR