

KI-B55ST80A-i70TSM PUR





- پنج سال گارانتی طلایی بدون قید و شرط کی دی تی
- شش سال ضمانت پایداری کیفیت تصویر

قابلیت های هوشمند

- عبور از خط
- فنس مجازی
- ورود به منطقه
- خروج از منطقه
- تشخیص چهره
- تشخیص پرسه زنی افراد
- تردد شمار هوشمند
- تشخیص صدای غیر عادی
- تشخیص عدم فوکوس لنز
- نظارت بر تراکم جمعیت
- تشخیص تراکم جمعیت هوشمند
- نقشه گرمایی
- تشخیص تغییر زاویه دوربین

سایر برتری ها

- پشتیبانی از میکرو SD با ظرفیت 256GB
- بدنه ضد آب و گرد و غبار با درجه IP67
- سرور انتقال تصویر در ایران
- پشتیبانی از H.264+ / H.265+
- پشتیبانی از ONVIF ورژن 2.6
- قابلیت دید در شب هوشمند
- قابلیت WDR, BLC, HLC, Defog و ROI تا 8 ناحیه
- پشتیبانی از ضبط اضطراری ANR
- امکان سفارش با نرم افزار امن و محدود شده جهت استفاده در مراکز با حساسیت بالا به همراه گواهینامه.

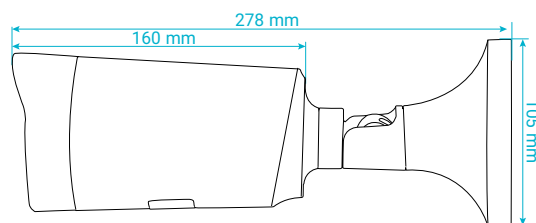

Camera	
Image Sensor	8MP (Sony-Japan) Progressive scan Cmos Sensor (1/2.8")
CPU	Dual-Core ARM Cortex
Resolution	3840*2160 (8MP)
Available IR Range	70~80 m Smart IR SMD Technology 50 m Warm Light Technology Smart Light Technology
D/N Filter	IR cut filter with auto switch
Min illumination	Color: 0.006 lux(AGC on) -B/W: 0.0 Lux(IR on)(Warm Light On)
Night Vision	Dual Light Technology
Lens	
Lens Type	Motorized Auto Focus
Focal Length	2.7~13.5 mm @F1.6
Angle of View	H-FOV: 108°~34°, V-FOV: 57°~19°, D-FOV: 128°~38°
DORI Distance	
DORI	Detect: 55~251m Observe: 22~100m Recognize: 11~50m Identify: 5.6~25m
Active Deterrence	
Red/Blue Light Warning	Flash: 5 s~30 s; frequency: high/medium/low
Sound Warning	Audio 1/2/3; Volume: high/medium/low; duration: 5 s~30 s; 106 dB
Picture Adjust	
Picture Function	120dB WDR/DWDR, 2D/3D DNR, BLC, HLC, ROI, Defog, Rotate
Image Stabilization	Yes (EIS)
Shutter Speed	Manual (1/3 ~ 1/100.000), Auto
Image Parameter Control	Off, On, Timing (Adjust 0 ~ 255)
D/N Control	Timing, Auto, Color on, Color off
S/N	> 56dB
Image Parameter	Saturation, Brightness, Contrast, Sharpness, Hue, Image Style, Anti Flicker
Video / Audio	
Video Compression	H.264+(Ultra H.264), H.265+ (Ultra H.265), MJPEG
Audio Compression	G.711A, G.711U, ACC, PCM, G.726
Frame Rate(60Hz)	30fps@ 8MP(3840*2160), 30fps@ 6MP, 30fps@ 4MP, 90fps@ 2MP
Transmission Stream	Triple Stream (Video Bit Rate:11 Kbps~16 Mbps)
Network	
Protocols	TCP/IP(v4, v6), ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, IGMP, UPnP, SMTP, UPnP-TM, P2P, Bonjour, SNMP (v1, v2, v3), UDP, NAT, Multicast, RTMP

Compatibility	Onvif Ver2-6, Profile S, G, T, CGI, SDK, API
Streaming Method	Unicast, Multicast
Web Viewer	IE, Edge, Firefox, Chrome
Smart Device	IOS, Android Phone & Tablet
Function	
Recording	FTP, NVR, CMS, VMS, SD Card, ANR
Record Type	Manual, Motion Detection, Smart Detection, Schedule
Alarm Triggers	All Intelligent Function
Event Action	Email, PTZ, Snapshot, Recording, Buzzer, Pop up, Show Message, Smart Light
Event	Smart Motion Detection, Video Shelter
Intelligent Function	13 Smart Function Line Crossing, Area Intrusion, Region Entrance, Region Exiting, Fast Moving, Loitering Detection, Blurred Detection, Scene Change Detection, Audio exception Detection, Face Detection, Detection, Parking Detection, Crowd Density Monitoring
Interface	
Network	1 RJ45 (10M / 100M) Ethernet Port
External Audio	Audio Out, Audio in
Internal Audio	Internal Mic ,Internal Speaker
Alarm	Alarm In, Alarm Out
CVBS	N/A
Power	PoE LAN, DC In
Reset Button	Yes (Optional)
Memory Slot	Yes - Micro SD/SDHC/SDXC Slot (256 Gb Max) (ANR Support)
General	
Protection Rating	IP67, IK10, 6KV Surge Protection
Power Supply	DC12V ± 10%
POE Supply	IEEE802.3af - Max 16 Watt
Web Language	English, Persian
Dimension	278*105 mm
Weight	1.3 Kg
Operation Humidity	Humidity 95% or less (non-condensing)
Operation Temp	-30°C ~ +60°C
Guarantee	
Product Guarantee	5 Years Gold Guarantee
MTBF	100K hrs min. MIL-HDBK-217F (25°)
Certificates	EN, CN, FCC, CFR