

KI-B85ST60A-i100TSMR




- پنج سال گارانتی طلایی بدون قید و شرط کی دی تی
- شش سال ضمانت پایداری کیفیت تصویر

قابلیت های هوشمند

- عبور از خط
- فنس مجازی
- ورود به منطقه
- خروج از منطقه
- تردد شمار افراد
- تشخیص چهره
- نقشه گرمایی
- تشخیص حرکت سریع افراد
- تشخیص تغییر زاویه دوربین
- تشخیص صدای غیر عادی
- تشخیص عدم فوکوس لنز
- تشخیص پرسه زنی افراد
- تشخیص تراکم جمعیت هوشمند

سایر برتری ها

- پشتیبانی از میکرو SD با ظرفیت 256GB
- بدنه ضد آب و گرد و غبار با درجه IP67, IK10
- سرور انتقال تصویر در ایران
- پشتیبانی از H.264+ / H.265 +
- پشتیبانی از ONVIF ورژن 2.6
- قابلیت دید در شب هوشمند
- قابلیت WDR, BLC, HLC, Defog و ROI تا ۸ ناحیه
- پشتیبانی از ضبط اضطراری ANR
- پشتیبانی از تکنولوژی تثبیت تصویر EIS
- پشتیبانی از تکنولوژی هوشمند نقشه گرمایی
- قابلیت ثبت دقیق پلاک وسایل نقلیه در سرعت بالا و شرایط دشوار (شب، باران، مه)
- امکان سفارش با نرم افزار امن و محدود شده جهت استفاده در مراکز با حساسیت بالا به همراه گواهینامه.

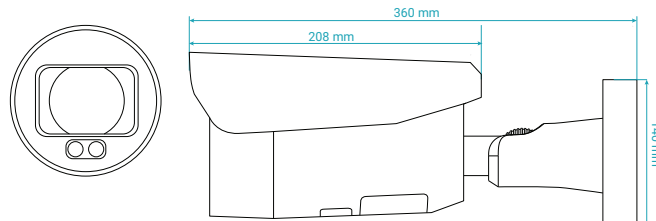

Camera	
Image Sensor	6MP (Sony-Japan) Progressive scan Cmos Sensor (1/2.8")
CPU	Dual-Core ARM Cortex
Resolution	3200*1800 (6MP)
Available IR Range	100~110 m Smart IR SMD Technology
D/N Filter	IR cut Filter with Auto Switch
Min illumination	Color: 0.001 lux(AGC on) - B/W: 0.0 Lux(IR on)
Night Vision	Color /IR
Red/Blue Light Warning	Flash: 5 s~30 s; frequency: high/medium/low
Lens	
Lens Type	Motorized Auto Focus
Focal Length	5~50 mm @F1.6
Angle of View	H-FOV: 48.3°~9.1°, V-FOV: 27.1°~5.1°, D-FOV: 54°~10.5°
DORI Distance	
DORI	Detect: 142~804m Observe: 57~321m Recognize: 28~160m Identify: 14~80m
Picture Adjust	
Picture Function	120dB WDR/DWDR, LPC, 2D/3D DNR, BLC, HLC, ROI, Defog
Image Stabilization	Yes (EIS)
Shutter Speed	Manual (1/3 ~ 1/100,000), Auto, Schedule, Custom
Image Parameter Control	Off, On, Timing (Adjust 0 ~ 255)
D/N Control	Timing, Auto, Color on, Color off, Sensivity, Filter Time
S/N	> 58dB
Image Parameter	Saturation, Brightness, Contrast, Sharpness, Hue, Image Style, Anti Flicker
Video / Audio	
Video Compression	H.264+(Ultra H.264), H.265+ (Ultra H.265), MJPEG
Audio Compression	G.711A, G.711U, ACC, PCM, G.726
Frame Rate(60Hz)	30fps@ 6MP(3200*1800), 30fps@ 4MP, 90fps@ 2MP
Transmission Stream	Triple Stream (Video Bit Rate: 11 Kbps~16 Mbps)
Network	
Protocols	TCP/IP(v4, v6), ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, IGMP, UPnP, SMTP, UPnP-TM, P2P, Bonjour, SNMP (v1, v2, v3), UDP, NAT, Multicast, RTMP
Compatibility	Onvif Ver2.6, Profile S, G, T, CGI, SDK, API

Streaming Method	Unicast, Multicast
Web Viewer	IE, Edge, Firefox, Chrome
Smart Device	IOS, Android Phone & Tablet
Function	
Recording	FTP, NVR, CMS, VMS, NAS, SD Card, ANR
Record Type	Manual, Motion Detection, Smart Detection, Schedule
Alarm Triggers	All Intelligent Function
Event Action	Email, PTZ, Snapshot, Recording, Buzzer, Pop up, Show Message
Event	Smart Motion Detection, Video Shelter
Intelligent Function	13 Smart Function Line Crossing, Area Intrusion, Region Entrance, Region Exiting, Fast Moving, Loitering Detection, Blurred Detection, Scene Change Detection, Audio exception Detection, Face Detection, Smart People Counting, Crowd Density Monitoring, Heat Map
Interface	
Network	1 RJ45 (10M / 100M) Ethernet Port
External Audio	Audio Out, Audio in
Internal Audio	Internal Mic
Alarm	Alarm In, Alarm Out
CVBS	N/A
Power	PoE LAN, DC In
Reset Button	Yes (Optional)
Memory Slot	Yes - Micro SD/SDHC/SDXC Slot (256 Gb Max) (ANR Support)
General	
Protection Rating	IP67, IK10, 6KV Surge Protection
Back Box	Yes
Power Supply	DC12V ± 10%
PoE Supply	IEEE802.3af - Max 15 Watt
Web Language	English, Persian
Dimension	360*140 mm
Weight	2.9 Kg
Operation Humidity	Humidity 95% or less (non-condensing)
Operation Temp	-30°C ~ +60°C
Guarantee	
Product Guarantee	5 Years Gold Guarantee
MTBF	100K hrs min. MIL-HDBK-217F (25°)
Certificates	EN, CN, FCC, CFR