

KI-D95ST80F-i30TSMP





- پنج سال گارانتی طلایی بدون قید و شرط کی دی تی
- شش سال ضمانت پایداری کیفیت تصویر

قابلیت های هوشمند

- عبور از خط
- فنس مجازی
- ورود به منطقه
- خروج از منطقه
- تشخیص چهره
- تشخیص پرسه زنی افراد
- تردد شمار هوشمند

سایر برتری ها

- پشتیبانی از میکرو SD با ظرفیت 256GB
- بدنه ضد آب و گرد و غبار با درجه IP67, IK10
- سرور انتقال تصویر در ایران
- پشتیبانی از H.264+ / H.265+
- پشتیبانی از ONVIF ورژن 2.6
- قابلیت دید در شب هوشمند
- قابلیت WDR, BLC, HLC, Defog و ROI تا ۸ ناحیه
- پشتیبانی از ضبط اضطراری ANR
- پشتیبانی از قابلیت 120db, Wide Dynamic Range
- امکان سفارش با نرم افزار امن و محدود شده جهت استفاده در مراکز با حساسیت بالا به همراه گواهی نامه.

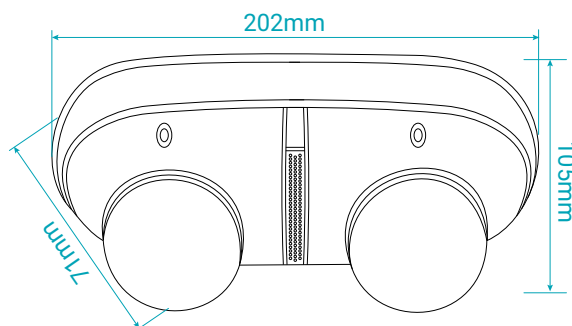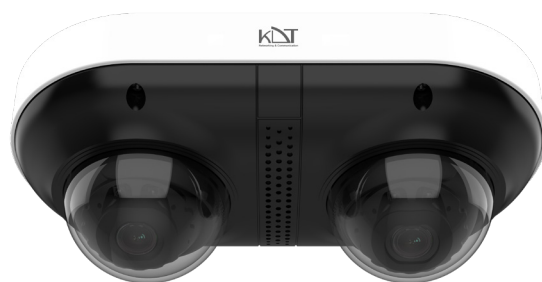

Camera	
Image Sensor	Dual 4MP Progressive scan Cmos Sensor (1/2.7")
CPU	Dual-Core ARM Cortex
Resolution	2688*1520 (2*4MP)
Available Warm Light Range	30~40 m, Smart IR SMD Technology
D/N Filter	IR Cut Filter with Auto Switch
Min illumination	Color: 0.006 lux(Color) - 0.0 Lux(IR On)
Night Vision	Color / IR
Lens	
Lens Type	Fixed
Focal Length	2.8 mm @F1.6
Angle of View	H-FOV: 101°, V-FOV: 55°, D-FOV: 121°
DORI Distance	
DORI	Detect: 71m Observe: 28m Recognize: 14m Identify: 7.1m
Active Deterrence	
Red/Blue Light Warning	N/A
Sound Warning	Audio 1/2/3; Volume: high/medium/low; duration: 5 s~30 s; 106 dB
Picture Adjust	
Picture Function	120dB WDR/DWDR, 2D/3D DNR, BLC, HLC, ROI, Defog
Shutter Speed	Manual (1/3 ~ 1/100,000), Auto
Image Parameter Control	Off, On, Timing (Adjust 0 ~ 255)
D/N Control	Timing, Auto, Color on, Color off
S/N	> 56dB
Image Parameter	Saturation, Brightness, Contrast, Sharpness, Hue, Image Style, Anti Flicker
Video / Audio	
Video Compression	H.264+(Ultra H.264), H.265+ (Ultra H.265), MJPEG (Substream)
Audio Compression	G.711A, G.711U, ACC, PCM, G.726
Frame Rate(60Hz)	30fps@ 4MP(2688*1520)
Transmission Stream	Triple Stream (Video Bit Rate:83 Kbps~10Mbps)
Network	
Protocols	TCP/IP(v4, v6), ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, IGMP, UPnP, SMTP, UPnP-TM, P2P, Bonjour, SNMP (v1, v2, v3), UDP, NAT, Multicast, RTMP
Compatibility	Onvif Ver2.6, Profile S, G, T, CGI, SDK, API

Streaming Method	Unicast, Multicast
Web Viewer	IE, Edge, Firefox, Chrome
Smart Device	IOS, Android Phone & Tablet
Function	
Recording	FTP, NVR, CMS, VMS, NAS, SD Card, ANR
Record Type	Manual, Motion Detection, Smart Detection, Schedule
Alarm Triggers	All Intelligent Function
Event Action	Email, PTZ, Snapshot, Recording, Buzzer, Pop up, Show Message
Event	Smart Motion Detection, Video Shelter
Intelligent Function	7 Smart Function Line Crossing, Area Intrusion, Region Entrance, Region Exiting, Loitering Detection, People Counting, Face Detection
Interface	
Network	1 RJ45 (10M / 100M) Ethernet Port
External Audio	Audio Out, Audio in
Internal Audio	Internal Mic, Internal Speaker
Alarm	Alarm In, Alarm Out
CVBS	N/A
Power	PoE LAN, DC In
Reset Button	Yes (Optional)
Memory Slot	Yes - Micro SD/SDHC/SDXC Slot (256 Gb Max) (ANR Support)
General	
Protection Rating	IP67, IK10 , 6KV Surge Protection
Power Supply	DC12V ± 10%
PoE Supply	IEEE802.3af - Max 12 Watt
Web Language	English, Persian
Dimension	202 × 105 × 71.2 mm
Weight	1.13 Kg
Operation Humidity	Humidity 95% or less (non-condensing)
Operation Temp	-40°C ~ +60°C
Guarantee	
Product Guarantee	5 Years Gold Guarantee
MTBF	100K hrs min- MIL-HDBK-217F (25°)
Certificates	EN, CN, FCC, CFR