

KI-S250ST80Z38-i250TS





قابلیت های هوشمند

- عبور از خط
- فنس مجازی
- ورود به منطقه
- خروج از منطقه
- گم شدن اشیاء
- اضافه شدن اشیاء
- تردد شمار افراد
- تشخیص چهره
- تشخیص حرکت سریع افراد
- تشخیص تغییر زاویه دوربین
- تشخیص پارک غیر مجاز خودرو
- تشخیص پرسه زنی افراد
- تشخیص صدای غیر عادی
- تشخیص عدم فوکوس لنز
- تشخیص تجمع افراد
- تشخیص انسان
- تشخیص خودرو

- پنج سال گارانتی طلایی بدون قید و شرط کی دی تی
- شش سال ضمانت پایداری کیفیت تصویر

سایر برتری ها

- پشتیبانی از میکرو SD با ظرفیت 256GB
- بدنه ضد آب و گرد و غبار با درجه IP67
- سرور انتقال تصویر در ایران
- پشتیبانی از H.264+ / H.265 +
- پشتیبانی از ONVIF ورژن 2.6
- قابلیت دید در شب هوشمند
- قابلیت WDR, BLC, HLC, Defog و ROI تا ناحیه 8 ناحیه
- پشتیبانی از ضبط اضطراری ANR
- پشتیبانی از تکنولوژی تثبیت تصویر EIS
- پشتیبانی از تکنولوژی تعقیب سوژه هوشمند
- پشتیبانی از تکنولوژی طرح سه بعدی در زوم و فوکوس
- امکان سفارش با نرم افزار امن و محدود شده جهت استفاده در مراکز با حساسیت بالا به همراه گواهینامه.

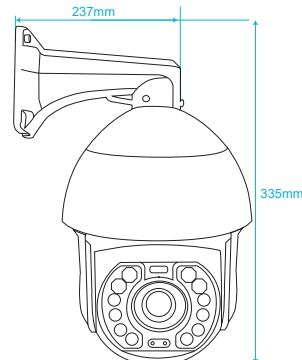

Camera	
Image Sensor	8MP Super Starlight (Sony-Japan) Progressive scan Cmos Sensor (1/1.8")
CPU	Dual-Core ARM Cortex
Resolution	3840*2160 (8MP)
Available IR Range	250~260 m Smart IR 12pcs Array
D/N Filter	IR Cut Filter Switch (ICR)
Min illumination	Color: 0.0008 Lux(AGC on) - B/W: 0.0 Lux(IR on)
PTZ	Pan Range: 360° Endless - Pan Speed: 0.1~120°/S Tilt Range: -10°~90° Auto Flip - Tilt Speed: 0.1~60°/S Number of Preset: 255 - Patrol: 32 - Pattern: 8 - Park Action: Yes
Night Vision	Super Starlight Technology
Lens	
Lens Type	Fixed
Focal Length	38X Optical Lens (6~228mm) (F-Stop F1.5~F4.8)
Angle of View	H-FOV: 180°, V-FOV: 180°, D-FOV: 180°
DORI Distance	
DORI	Detect: 128~4877m Observe: 51~1966m Recognize: 25~975m Identify: 12~487m
Picture Adjust	
Picture Function	120dB WDR/DWDR, 2D/3D DNR, BLC, HLC, ROI, Defog
Digital Zoom	16X
Image Stabilization	Yes (EIS)
Shutter Speed	Manual (1/3 ~ 1/100,000), Auto
Image Control	Off, On, Timing (Adjust 0 ~ 255)
D/N Control	Timing, Auto, Color on, Color off
S/N	> 56dB
Image Setting	Saturation, Brightness, Contrast, Sharpness, Hue, Image Style, Anti Flicker
Video / Audio	
Video Compression	H.264+(Ultra H.264), H.265+ (Ultra H.265)
Audio Compression	G.711A, G.711U, ACC, PCM, G.726
Frame Rate(60Hz)	30fps@ 8MP(3840*2160), 30fps@ 6MP, 60fps@ 2MP
Transmission Stream	Triple Stream (Code Rate: 32Kbps-16Mbps)
Network	
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, IGMP, UPnP, SMTP, UPnP-TM, P2P, Bonjour, RTMP
Compatibility	Onvif Ver2.6, Profile S, G, T, CGI, SDK, API
Streaming Method	Unicast, Multicast

Web Viewer	IE, Edge, Firefox, Chrome
Function	
Recording	FTP, NVR, CMS, VMS, NAS, SD Card, ANR
Record Type	Manual, Motion Detection, Smart Detection, Schedule
Alarm Triggers	All Intelligent Function
Event Action	Email, PTZ, Snapshot, Recording, Buzzer, Pop up, Show Message
Event	Smart Motion Detection, Video Shelter
Auto Track	Yes
3D Position/3D Zoom	Yes
Intelligent Function	17 Smart Function Line Crossing, Area Intrusion, Unattended Object, Object Missing, Region Entrance, Region Exiting, Fast Moving, Loitering Detection, People Gathering Detection, Parking Detection, Blurred Detection, Scene Change Detection, Audio Exception Detection, Crossing Line Statistics, Face Detection, Human Detection, Car Shape Detection
Interface	
Network	RJ45(10/100Mbps) Ethernet Port
External Audio	Audio Out, Audio in
Internal Audio	N/A
Alarm	Alarm Out, Alarm In
CVBS	N/A
Power	PoE LAN, DC/AC In
Reset Button	Yes (Optional)
Memory Slot	Yes - Micro SD/SDHC/SDXC Slot (256 Gb Max) (ANR Support)
General	
Protection Rating	IP67, IK10, 6KV Surge Protection
Cover Lens	Nano Glass
Power Supply	AC24 V ± 25% (3A Max)
PoE Supply	IEEE802.3at-Max 25 Watt
Web Language	English, Persian
Dimension	237*335 mm
Weight	5-2 kg
Case Size	8"
Operation Humidity	Max Up to 95%RH(Non Condensing)
Operation Temp	-40°C ~ +70°C
Guarantee	
Product Guarantee	5 Years Gold Guarantee
MTBF	100K hrs min- MIL-HDBK-217F (25°)